

FLAT

WR E28

Specific Wax/resin



WR E28 is a wax/resin that combines high printability and resistance.

Even if it prints with wax/resin settings, it can provide performances similar to resin ribbons.

It is recommended for applications that need endurance to high temperatures or abrasion, although the substrate is not compatible with a resin ribbon.

WR E28 is a multipurpose ribbon that prints on a large variety of materials up to 12 IPS even on coated or preprinted labels.

TECHNICAL FEATURES

COLOR	Black
BACK COATING	Silicone base
IMAGE DARKNESS	1.70 ODR
INK MELTING POINT	80°±3°C
STORAGE CONDITIONS	12 Months / 5-35°C 20-80% Relative Humidity Rate
PRINTING SPEED	12 IPS
FILM THICKNESS	4.5 microns
TOTAL THICKNESS	8.0 microns



STANDARD

WRITE WR
WRITE M



PREMIUM

QUEEN BEE
WRITE WR+



EXCELLENT

WR E28

PRINTING FEATURES

DARKNESS



SCRATCH RESISTANCE



SHARPNESS




PRINT TEMPERATURE



PRINT SPEED










BARCODE 90°




WR E28

Specific Wax/resin




RECOMMENDED APPLICATIONS

 <p>LOGISTICS</p>	 <p>PACKAGING</p>	 <p>CHEMICAL</p>	 <p>FOOD & BEVERAGE</p>	 <p>HORTICULTURE</p>
 <p>AUTOMOTIVE</p>	 <p>MEDICAL</p>	 <p>ELECTRONICAL</p>	 <p>HEALTH AND BEAUTY</p>	 <p>TEXTILE</p>

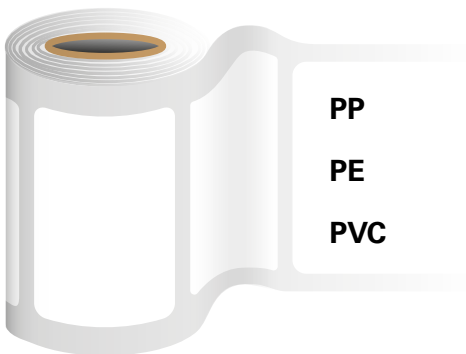RECOMMENDED SUBSTRATES



CHEMICALS RESISTANCE

 <p>ALCOHOL</p>	<input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/>
 <p>GASOLINE</p>	<input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/>
 <p>GASOLINE + OIL</p>	<input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/>

COMPLIANCES



T H E R M A L
T R A N S F E R
R I B B O N

E.U.R.O. Srl
Via Pacinotti, 28
30033 Noale (VE)

Tel. +39 041 3195211
ttr@eurosr.com
www.eurosr.com

All information in the datasheet has been produced for the exclusive use of E.u.r.o. s.r.l. Any reproduction, even partial, is prohibited. The BEE trademark is registered. The measured values may slightly vary in a different environment. The information contained may change without notice or notification. The information presented here is a general guideline, for further information please contact our offices. All product certifications have been registered with the original codes of the raw material.