

NEAR EDGE

WRITE T10

Multi-purpose Wax/resin



WRITE T10 is a near-edge wax resin for TTO and desktop printers, and provides extreme resistance.

It is designed and recommended to print on PET and synthetic materials at high speed. Its remarkable scratch and smudge resistance make it one of the best Near edge ribbon existing in the market.

TECHNICAL FEATURES

COLOR	Black
BACK COATING	Silicone base
IMAGE DARKNESS	1.60 ODR
INK MELTING POINT	70°±3°C
STORAGE CONDITIONS	12 Months / 5-35°C 20-80% Relative Humidity Rate
PRINTING SPEED	32 IPS
FILM THICKNESS	4.5 microns
TOTAL THICKNESS	8.0 microns



STANDARD

EDGE BEE



PREMIUM

WRITE TX
WRITE T+
WRITE T



EXCELLENT

WRITE T10
WRITE T12

PRINTING FEATURES

DARKNESS




SCRATCH RESISTANCE



SHARPNESS




PRINT TEMPERATURE



PRINT SPEED



BARCODE 90°



WRITE T10

Multi-purpose Wax/resin

RECOMMENDED APPLICATIONS



LOGISTICS



PACKAGING



CHEMICAL




FOOD & BEVERAGE



HORTICULTURE



AUTOMOTIVE




MEDICAL



ELECTRONICAL




HEALTH AND BEAUTY



TEXTILE

RECOMMENDED SUBSTRATES

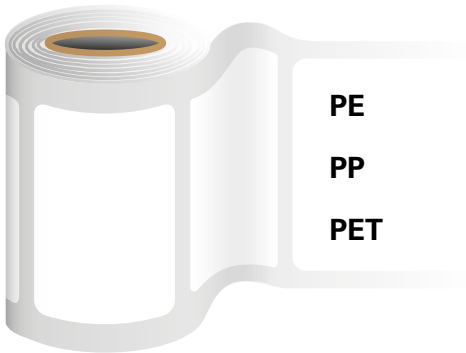

CHEMICALS RESISTANCE



ALCOHOL



GASOLINE



GASOLINE + OIL



COMPLIANCES



ISEGA



T H E R M A L
T R A N S F E R
R I B B O N

E.U.R.O. Srl
Via Pacinotti, 28
30033 Noale (VE)

Tel. +39 041 3195211
ttr@eurossrl.com
www.eurossrl.com

All information in the datasheet has been produced for the exclusive use of E.u.r.o. s.r.l. Any reproduction, even partial, is prohibited. The BEE trademark is registered. The measured values may slightly vary in a different environment. The information contained may change without notice or notification. The information presented here is a general guideline, for further information please contact our offices. All product certifications have been registered with the original codes of the raw material.