

FLAT

RESIN BEE

Soft resin



RESIN BEE is an economical resin, which ensures a surprising versatility on many substrates.

It is designed to print on synthetics and papers, and it offers a high quality / price ratio for customers looking for a cost-effective and long-lasting solution.

It provides dark, crisp and sharp printings, and a strong resistance to scratches. In addition, it is the ideal choice for application requiring durability to alcohol and standard chemicals.

TECHNICAL FEATURES

COLOR	Black
BACK COATING	Silicone base
IMAGE DARKNESS	1.75 ODR
INK MELTING POINT	80°±3°C
STORAGE CONDITIONS	12 Months / 5-35°C 20-80% Relative Humidity Rate
PRINTING SPEED	8 IPS
FILM THICKNESS	4.5 microns
TOTAL THICKNESS	6.9 microns



STANDARD

RESIN BEE



PREMIUM

RESIN E35
RESIN E30
WRITE R



EXCELLENT

RESIN E34

PRINTING FEATURES

DARKNESS



SCRATCH RESISTANCE



SHARPNESS




PRINT TEMPERATURE



PRINT SPEED













BARCODE 90°




RESIN BEE

Soft resin




RECOMMENDED APPLICATIONS

				
LOGISTICS	PACKAGING	CHEMICAL	FOOD & BEVERAGE	HORTICULTURE
				
AUTOMOTIVE	MEDICAL	ELECTRONICAL	HEALTH AND BEAUTY	TEXTILE

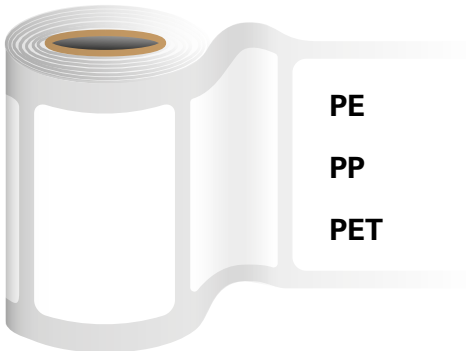RECOMMENDED SUBSTRATES



CHEMICALS RESISTANCE

	ALCOHOL ● ● ● ● ●
	GASOLINE ● ○ ○ ○ ○
	GASOLINE + OIL ● ● ○ ○ ○

COMPLIANCES



ISEGA



T H E R M A L
T R A N S F E R
R I B B O N

E.U.R.O. Srl
Via Pacinotti, 28
30033 Noale (VE)

Tel. +39 041 3195211
ttr@eurosrl.com
www.eurosrl.com

All information in the datasheet has been produced for the exclusive use of E.u.r.o. s.r.l. Any reproduction, even partial, is prohibited. The BEE trademark is registered. The measured values may slightly vary in a different environment. The information contained may change without notice or notification. The information presented here is a general guideline, for further information please contact our offices. All product certifications have been registered with the original codes of the raw material.