

FLAT

RESIN E34

Specific resin



RESIN E34 is a premium resin UL certified for durable applications.

It is designed to resist aggressive chemicals such as isopropyl and brake fluid, impeccable resistance to scratches.

It provides clear and crisp printed images and it is extremely flexible and versatile with a wide range of supports.

BS5609 certified for marine shipping applications, it guarantees a resistance to salt water for extended periods of time and extreme weather conditions.

TECHNICAL FEATURES

COLOR	Black
BACK COATING	Silicone base
IMAGE DARKNESS	1.70 ODR
INK MELTING POINT	110°±3°C
STORAGE CONDITIONS	12 Months / 5-35°C 20-80% Relative Humidity Rate
PRINTING SPEED	8 IPS
FILM THICKNESS	4.5 microns
TOTAL THICKNESS	9.0 microns



STANDARD

RESIN BEE



PREMIUM

RESIN E35

RESIN E30

WRITE R



EXCELLENT

RESIN E34

PRINTING FEATURES

DARKNESS




SCRATCH RESISTANCE



SHARPNESS




PRINT TEMPERATURE



PRINT SPEED



BARCODE 90°



RESIN E34

Specific resin

RECOMMENDED APPLICATIONS



LOGISTICS



PACKAGING




CHEMICAL



FOOD & BEVERAGE



HORTICULTURE



AUTOMOTIVE



MEDICAL



ELECTRONICAL




HEALTH AND BEAUTY




TEXTILE

RECOMMENDED SUBSTRATES

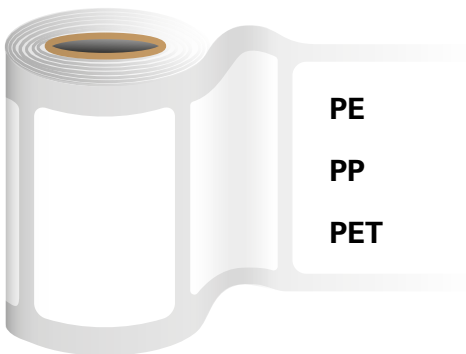

CHEMICALS RESISTANCE

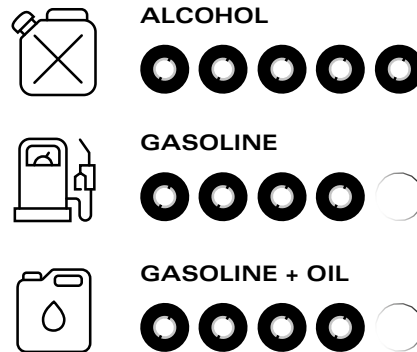

COMPLIANCES



ISEGA



FDA



T H E R M A L
T R A N S F E R
R I B B O N

E.U.R.O. Srl
Via Pacinotti, 28
30033 Noale (VE)

Tel. +39 041 3195211
ttr@eurosr.com
www.eurosr.com

All information in the datasheet has been produced for the exclusive use of E.u.r.o. s.r.l. Any reproduction, even partial, is prohibited. The BEE trademark is registered. The measured values may slightly vary in a different environment. The information contained may change without notice or notification. The information presented here is a general guideline, for further information please contact our offices. All product certifications have been registered with the original codes of the raw material.