

FLAT

RESIN E35

Multi-purpose resin



RESIN E35 is the ideal resin ribbon for a multitude of applications.

Designed for industrial demanding printings, Resin E35 prints high quality crisps and clear barcodes.

It suits incredibly well to many substrates such as vellum, PP and coated labels.

It resists successfully scratches and other challenging situations, and this makes it the ideal product for the most demanding applications.

TECHNICAL FEATURES

COLOR	Black
BACK COATING	Silicone base
IMAGE DARKNESS	1.80 ODR
INK MELTING POINT	110°±3°C
STORAGE CONDITIONS	12 Months / 5-35°C 20-80% Relative Humidity Rate
PRINTING SPEED	8 IPS
FILM THICKNESS	4.5 microns
TOTAL THICKNESS	9.0 microns



STANDARD

RESIN BEE



PREMIUM

RESIN E35

RESIN E30

WRITE R



EXCELLENT

RESIN E34

PRINTING FEATURES

DARKNESS



SCRATCH RESISTANCE



SHARPNESS




PRINT TEMPERATURE



PRINT SPEED












BARCODE 90°




RESIN E35

Multi-purpose resin




RECOMMENDED APPLICATIONS

				
LOGISTICS	PACKAGING	CHEMICAL	FOOD & BEVERAGE	HORTICULTURE
				
AUTOMOTIVE	MEDICAL	ELECTRONICAL	HEALTH AND BEAUTY	TEXTILE

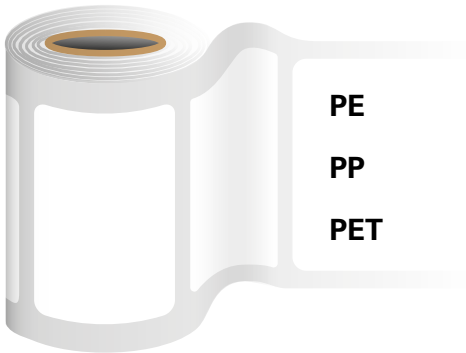RECOMMENDED SUBSTRATES



CHEMICALS RESISTANCE

	ALCOHOL ● ● ● ● ●
	GASOLINE ● ● ○ ○ ○
	GASOLINE + OIL ● ● ○ ○ ○

COMPLIANCES



T H E R M A L
T R A N S F E R
R I B B O N

E.U.R.O. Srl
Via Pacinotti, 28
30033 Noale (VE)

Tel. +39 041 3195211
ttr@eurosr.com
www.eurosr.com

All information in the datasheet has been produced for the exclusive use of E.u.r.o. s.r.l. Any reproduction, even partial, is prohibited. The BEE trademark is registered. The measured values may slightly vary in a different environment. The information contained may change without notice or notification. The information presented here is a general guideline, for further information please contact our offices. All product certifications have been registered with the original codes of the raw material.