

NEAR EDGE

RESIN NE39

Multi-purpose Resin



RESIN NE39 is a near edge resin for industrial desktop printers.

This product will ensure an extraordinary resistance against every chemical, as well as providing dark, defined and precise printings.

It is highly recommended to print on synthetic materials such as PP, Polyethylene, Polyester and many other supports.

TECHNICAL FEATURES

COLOR	Black
BACK COATING	Silicone base
IMAGE DARKNESS	1.80 ODR
INK MELTING POINT	86°±3°C
STORAGE CONDITIONS	12 Months / 5-35°C 20-80% Relative Humidity Rate
PRINTING SPEED	12 IPS
FILM THICKNESS	4.5 microns
TOTAL THICKNESS	6.0 microns



STANDARD



PREMIUM



EXCELLENT

RESIN NE
RESIN NE39

PRINTING FEATURES

DARKNESS




SCRATCH RESISTANCE



SHARPNESS



PRINT TEMPERATURE



PRINT SPEED













BARCODE 90°




RESIN NE39

Multi-purpose Resin





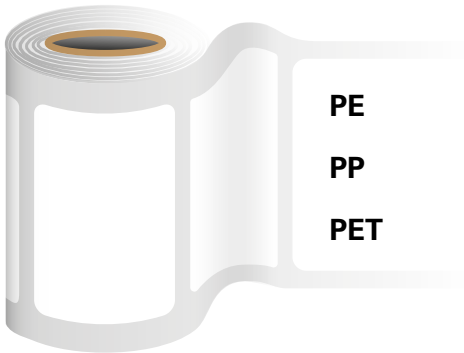

RECOMMENDED APPLICATIONS

 <p>LOGISTICS</p>	 <p>PACKAGING</p>	 <p>CHEMICAL</p>	 <p>FOOD & BEVERAGE</p>	 <p>HORTICULTURE</p>
 <p>AUTOMOTIVE</p>	 <p>MEDICAL</p>	 <p>ELECTRONICAL</p>	 <p>HEALTH AND BEAUTY</p>	 <p>TEXTILE</p>

RECOMMENDED SUBSTRATES



CHEMICALS RESISTANCE

 <p>ALCOHOL</p>	
 <p>GASOLINE</p>	
 <p>GASOLINE + OIL</p>	

COMPLIANCES



ISEGA



THERMAL
TRANSFER
RIBBON

E.U.R.O. Srl
Via Pacinotti, 28
30033 Noale (VE)

Tel. +39 041 3195211
ttr@eurosr.com
www.eurosr.com

All information in the datasheet has been produced for the exclusive use of E.u.r.o. s.r.l. Any reproduction, even partial, is prohibited. The BEE trademark is registered. The measured values may slightly vary in a different environment. The information contained may change without notice or notification. The information presented here is a general guideline, for further information please contact our offices. All product certifications have been registered with the original codes of the raw material.