

NEAR EDGE

RESIN NE

Resin for TTO



RESIN NE is a resin particularly suggested for near edge TTO printers.

This product has been designed to print on plastic packagings at high speed. It is recommended for applications that need to resist sterilisation processes or for shiny and glossy aluminium substrates.

TECHNICAL FEATURES

COLOR	Black
BACK COATING	Silicone base
IMAGE DARKNESS	2.40 ODR
INK MELTING POINT	80°±3°C
STORAGE CONDITIONS	12 Months / 5-35°C 20-80% Relative Humidity Rate
PRINTING SPEED	40 IPS
FILM THICKNESS	4.5 microns
TOTAL THICKNESS	6.0 microns



STANDARD



PREMIUM



EXCELLENT

RESIN NE

RESIN NE39

PRINTING FEATURES

DARKNESS



SCRATCH RESISTANCE



SHARPNESS




PRINT TEMPERATURE



PRINT SPEED



BARCODE 90°



RESIN NE

Resin for TTO

RECOMMENDED APPLICATIONS



LOGISTICS



PACKAGING



CHEMICAL




FOOD & BEVERAGE




HORTICULTURE



AUTOMOTIVE




MEDICAL



ELECTRONICAL




HEALTH AND BEAUTY



TEXTILE

RECOMMENDED SUBSTRATES

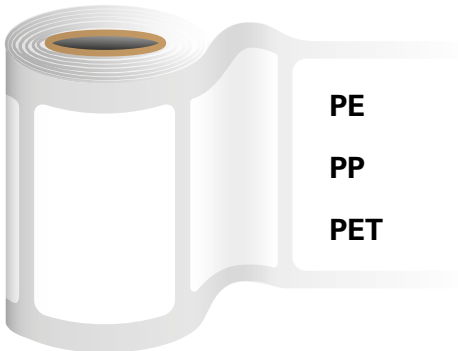

CHEMICALS RESISTANCE



ALCOHOL



GASOLINE



GASOLINE + OIL



COMPLIANCES



ISEGA



T H E R M A L
T R A N S F E R
R I B B O N

E.U.R.O. Srl
Via Pacinotti, 28
30033 Noale (VE)

Tel. +39 041 3195211
ttr@eurosr.com
www.eurosr.com

All information in the datasheet has been produced for the exclusive use of E.u.r.o. s.r.l. Any reproduction, even partial, is prohibited. The BEE trademark is registered. The measured values may slightly vary in a different environment. The information contained may change without notice or notification. The information presented here is a general guideline, for further information please contact our offices. All product certifications have been registered with the original codes of the raw material.